


BACKUP BATTERIES

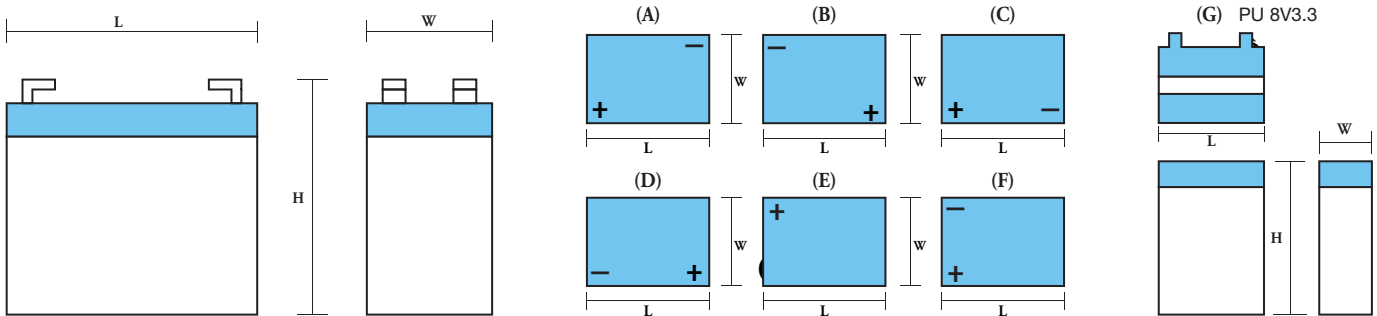

Battery Model	Nominal Voltage (V)	Rated Capacity to Final Voltage (AH)				Dimension (mm)				Approx. Weight (KG)	Unit Per Box (PCS)	Terminal Position
						Length (L)	Width (W)	Height (H)	Height (H) Including Terminal			
		1.75 Volts/cell	1.7V/c	1.3V/c								
		20 HR	10 HR	5 HR	1 HR							
PU 6V1.3	6	1.30	1.20	1.10	0.73	97±1	24±1	51±2	56±2	0.28	20	(C)
PU 6V3.2	6	3.20	3.00	2.72	1.67	123±1	32±1	60±2	66±2	0.46	20	(C)
PU 6V3.3	6	3.30	3.10	2.80	1.73	134±1	34±1	60±2	66±2	0.48	20	(C)
PU 6V4	6	4.00	3.80	3.40	2.40	70±1	47±1	101±2	107±2	0.68	20	(A)
PU 6V12	6	12.00	11.10	9.50	6.30	151±1	50±1	94±2	100±2	1.80	10	(C)
PU 8V3.3	8	3.30	3.10	2.80	1.73	67±1	46±1	91±2	91±2	0.62	20	(G)
PU 12V1.3	12	1.30	1.20	1.10	0.73	97±1	43±1	52±2	57±2	0.48	20	(F)
PU 12V2.2	12	2.20	2.10	1.87	1.16	178±1	34±1	60±2	66±2	0.78	20	(C)
PU 12V3.3	12	3.30	3.10	2.80	1.73	134±1	67±1	60±2	66±2	1.10	10	(E)
PU 12V4	12	4.00	3.80	3.40	2.40	90±1	70±1	101±2	106±2	1.30	10	(C)
PU 12V7	12	7.00	6.70	5.95	4.00	151±1	65±1	95±2	101±2	2.00	8	(E)
PU 12V12	12	12.00	11.40	9.50	6.30	151±1	99±1	96±2	100±2	3.60	4	(E)
PU 12V18	12	18.00	17.20	15.20	10.80	181±1	76±1	167±2	167±2	5.10	2	(D)
PU 12V26	12	26.00	23.80	21.60	15.10	166±1	175±1	126±2	126±2	8.60	1	(D)
PU 12V40	12	40.00	38.00	34.00	24.00	197±1	165±1	170±2	170±2	13.40	1	(D)

Battery Model	Nominal Voltage (V)	Rated Capacity to Final Voltage (AH)				Dimension (mm)				Approx. Weight (KG)	Unit Per Box (PCS)	Terminal Position
		If Terminal Voltage ≤ 10.5V				Length (L)	Width (W)	Height (H)	Height (H) Including Terminal			
		20 HR	10 HR	5 HR	1 HR							
PU 12V50	12	57.10	54.30	48.60	33.60	263±3	172±3	221±2	222±2	17.30	1	(C)
PU 12V60	12	68.60	65.10	58.30	40.30	263±3	172±3	221±2	222±2	20.20	1	(C)
PU 12V65	12	69.00	66.20	60.70	42.30	350±3	167±3	178±2	178±2	21.50	1	(C)
PU 12V70	12	80.00	76.00	68.00	47.00	303±3	173±3	224±2	225±2	23.00	1	(C)
PU 12V100	12	95.70	93.80	78.20	52.40	415±3	173±3	224±2	225±2	30.50	1	(C)
PU 12V150	12	143.60	140.70	117.30	78.60	495±3	205±3	209±2	242±2	43.00	1	(F)
PU 12V200	12	191.40	187.60	156.40	104.80	497±3	258±3	209±2	242±2	61.00	1	(F)

Specifications are subject to change without prior notice.

POWER UP ADVANTAGES

- Long service life
- Rugged construction
- Extreme temperature performance
- Fast recharge
- High discharge rates
- Low internal resistance

DEMCO
INDUSTRIES SDN BHD
www.demcoalarm.com

Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: +603-3290 3333
Fax: +603-3290 2288
E-mail: sales@demcoalarm.com



Quality without Compromise