

MOTOR DRIVEN DOME BELLS D-132



Model D-132



DESCRIPTION

DEMCO Motor Driven Alarm Bells **D-132** are professionally designed to meet the special requirements of fire alarm/release systems where low power consumption and high sound output is essential. Due to its low current drain, high level sound can be achieved with multiple units on a single 2-wire output circuit. Proven simplicity of design, highest quality materials consisting of a heavy duty micro motor with built-in varistor suppression elements ensuring bell's reliability and long life. Model **D-132** range is designed to meet the tough requirements of EN54-3:2001, they are not only easy to install but are capable of operating under the most adverse conditions.

DEMCO ADVANTAGES

- Plug-in power supply.
- Interchangeable base suitable for surface mounting.
- Two gong sizes – 6 and 8 inches.
- Zero standby current.
- Low current consumption.
- Louder mechanical Resonant Tone.
- Integral RFI suppression to minimize induced noise on the alarm circuit.
- DC Voltage available in 12V and 24V.

DECIBEL LEVELS

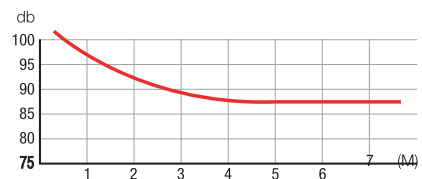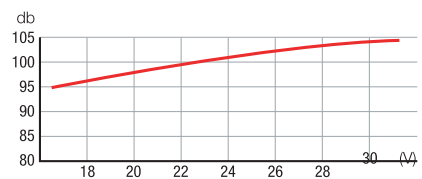


DECIBEL RATINGS/SPECIFICATIONS

DC Type	Decibel rating @ 1m (3ft)		
Voltage	Amps	150mm (6")	200mm (8")
12	0.05	95 dB	98 dB
24	0.03	95 dB	103 dB
Net/Gross Weight		748/812g	1130/1280g

Specifications are subject to change.




Front View of Universal Base for 6" and 8" bells



MOUNTING INSTRUCTION

The bell must be mounted with its striker pointing downward.

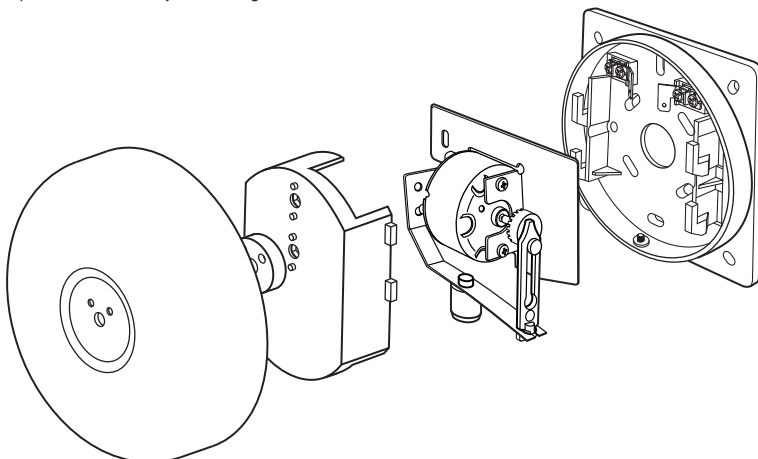

DEMCO
INDUSTRIES SDN BHD
www.demcoalarm.com

Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: +603-3290 3333
Fax: +603-3290 2288
E-mail: sales@demcoalarm.com



Quality without Compromise