


SWING TYPE FIRE HOSE REEL



D-807*

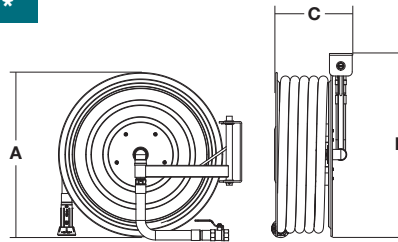


Swing Manual Model No.	Hose Diameter & Length	Height (A in mm)	Width (B in mm)	Width (C in mm)	Min. Cabinet Size (W X H X D) in mm
D-807-19	19mm X 30m	550	570-580	180	760 X 720 X 200
D-807-25	25mm X 30m	550	570-580	210	760 X 720 X 230

*Please specify full model number when placing order.



D-806*

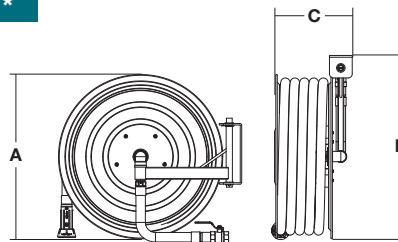

Swing Automatic Model No.	Hose Diameter & Length	Height (A in mm)	Width (B in mm)	Width (C in mm)	Min. Cabinet Size (W X H X D) in mm
D-806-19	19mm X 30m	550	610-680	200	700 X 700 X 230
D-806-25	25mm X 30m	550	610-680	230	700 X 700 X 260


*Please specify full model number when placing order.

DEMCO ADVANTAGES

- Manufactured to BS EN 671-1 & LPCB certified.
- Available in both manual and automatic versions.
- Easy and flexible installation with flexible direct-connect inlet hose without multiple joints thus reducing the risk of potential future leakages.
- Supplied with swing arm bracket, a 19mm (¾") or 25mm (1") hose outlet, 30m EN 694 compliant hose, duct pipe, nozzle and interlock.
- Robust yet lightweight, and with the quick-install swing arm bracket allowing single person fitting.
- Swinging arm allows the flexibility of left or right hand mounting.
- Double 180° swivel joints to enable rotating and swinging in more than one plane thus suitable to be installed in steel cabinets and recess wall.
- Maximum working pressure 12 bar (174psi). Test pressure 18 bar (261psi)
- Unwind hose without the need for hose guide.
- Automatic hose reel has integrated automatic stop valve which will open after 2 revolution of the reel.

ACCESSORIES

LPCB Certified Hose Reel Nozzles

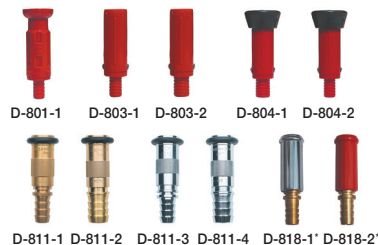

Code No.	Setting	Nozzle Diameter	Inlet Size	Flow Rate at 2 bar/6 bar (L/Min/Jet/Spray)	Throw Range at 2 bar
D-801-1	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-803-1	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-803-2	Jet/Spray	7mm	25mm (1")	>31/53	>11.2
D-804-1	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-804-2	Jet/Spray	7mm	25mm (1")	>31/53	>11.2
D-811-1	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-811-2	Jet/Spray	6mm	25mm (1")	>39/68	>11.2
D-811-3	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-811-4	Jet/Spray	6mm	25mm (1")	>39/68	>11.2
D-818-1	Jet/Spray	6mm	19mm (¾")	>24/41	>11.2
D-818-2	Jet/Spray	7mm	19mm (¾")	>31/53	>11.2

*LPCB approval pending



Code No. D-820

Ball Valve

- 1"-1½" Brass Ball valve
- LPCB Certified
- Working pressure >18 bar (261psi)

DEMCO INDUSTRIES SDN BHD
www.demcoalarm.com

Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: +603-3290 3333
Fax: +603-3290 2288
E-mail: sales@demcoalarm.com



Fire Hose EN 694

- Outer layer is coated with UV inhibitor for colourfastness
- LPCB Certified



Code No.	Hose	ID	OD	Max. WP	Min. BP	Adhesion
D-830-19R	19mmX1W	19mm	25mm	12 bar	42 bar	≥ 1.5kN/m
D-830-25R	19mmX2W	19mm	26mm	20 bar	50 bar	≥ 1.5kN/m
D-830-19B	25mmX1W	25mm	32mm	12 bar	42 bar	≥ 1.5kN/m
D-830-25B	25mmX2W	25mm	33mm	20 bar	50 bar	≥ 1.5kN/m
D-830-33	33mm	33mm	42mm	7 bar	24.5 bar	≥ 1.5kN/m

Specifications are subject to change without prior notice.

Quality without Compromise