


PD GLASS BULB SPRINKLER & ACCESSORIES





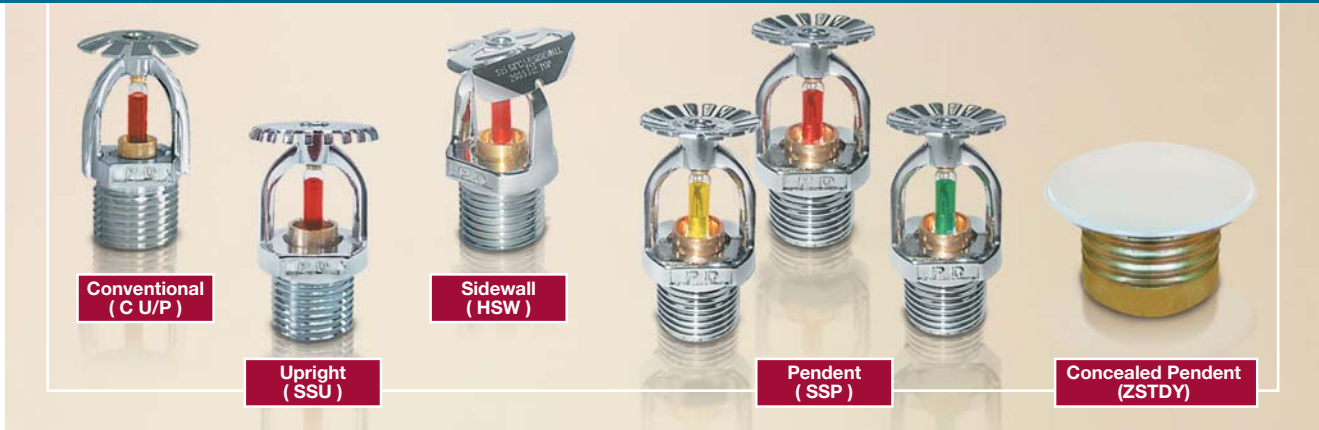

DESCRIPTION

PD's range of automatic sprinklers is compact, highly durable and comes in several temperature ratings and K-Factors to meet various design requirements. They are available in Pendants (SSP), Uprights (SSU), Sidewalls (HSW) and Conventional (C U/P). Incorporated with either 3mm (Quick Response) or 5mm (Standard Response) diameter frangible glass bulb. PD's UL listed sprinkler heads are designed for use in light, ordinary, and extra hazard, commercial occupancies such as banks, hotels, shopping malls, factories, refineries, chemical plants, etc. If aesthetics is the major consideration, then Concealed Glass Bulb Flush Pendent Sprinkler (ZSTDY) should be your ideal choice.

ADVANTAGES

- UL Listed glass bulb and seal plate
- Heat sensing component (glass bulb) and seal gasket from Germany
- Small frame and narrow profile bulb for enhanced appearance
- Chrome-plated finish for corrosive resistance
- Assembled and tested in production line utilizing German equipment and methodology

ACCESSORIES

	Plain Sprinkler Rosette • Suitable for 1/2" sprinkler • Stainless steel	<table border="1"> <thead> <tr> <th>Code No.</th> <th>Material</th> </tr> </thead> <tbody> <tr> <td>SPD-306SS</td> <td>Stainless Steel</td> </tr> <tr> <td>SPD-306W</td> <td>M.S. Epoxy White</td> </tr> </tbody> </table>	Code No.	Material	SPD-306SS	Stainless Steel	SPD-306W	M.S. Epoxy White
Code No.	Material							
SPD-306SS	Stainless Steel							
SPD-306W	M.S. Epoxy White							
	Recessed Sprinkler Rosette • Suitable for 1/2" sprinkler • Adjustable rosettes • M.S. Chrome finish	<table border="1"> <thead> <tr> <th>Code No.</th> <th>Material</th> </tr> </thead> <tbody> <tr> <td>SPD-307C</td> <td>M.S. Chrome</td> </tr> <tr> <td>SPD-307W</td> <td>M.S. Epoxy White</td> </tr> </tbody> </table>	Code No.	Material	SPD-307C	M.S. Chrome	SPD-307W	M.S. Epoxy White
Code No.	Material							
SPD-307C	M.S. Chrome							
SPD-307W	M.S. Epoxy White							
	Sprinkler Guard To be used for area where sprinkler may be susceptible to be accidentally struck	<table border="1"> <thead> <tr> <th>Code No.</th> <th>Material</th> </tr> </thead> <tbody> <tr> <td>SPD-308C</td> <td>M.S. Chrome</td> </tr> </tbody> </table>	Code No.	Material	SPD-308C	M.S. Chrome		
Code No.	Material							
SPD-308C	M.S. Chrome							
	Sprinkler Wrench Used for installation of sprinklers	<table border="1"> <thead> <tr> <th>Code No.</th> <th>Material</th> </tr> </thead> <tbody> <tr> <td>SPD-309</td> <td>Cast Iron</td> </tr> </tbody> </table>	Code No.	Material	SPD-309	Cast Iron		
Code No.	Material							
SPD-309	Cast Iron							

SPECIFICATIONS

Type	Rated Operation Temperature	Max. Ambient Temperature	Factor K	Glass Bulb Diameter (mm)	Thread (BSPT)	Finish
Conventional	68°C ●	38°C	80 ± 4	ø3, ø5	R 1/2"	Chrome
	79°C ●	49°C				
	93°C ●	63°C				
Upright	68°C ●	38°C	80 ± 4	ø3, ø5	R 1/2"	Chrome
	79°C ●	49°C				
	93°C ●	63°C				
Pendent	68°C ●	38°C	80 ± 4	ø3, ø5	R 1/3"	Chrome
	79°C ●	49°C				
	93°C ●	63°C				
Sidewall	68°C ●	38°C	80 ± 4	ø3, ø5	R 1/3"	Chrome
	79°C ●	49°C				
	93°C ●	63°C				

Type	K Factor
Concealed Pendent 1/2" NPT Thread Sprinklers 3 Positions Adjustable	5.6 (80)
	2.8 (37)
	4.2 (57)

Specifications are subject to change without prior notice.

* Conventional sprinkler only manufactured with K=5.6 (80) and K=8.1 (116)

** Only horizontal sidewall sprinklers.

• Rated Operation Temperature

● Red = 155°F/68°C

● Yellow = 175°F/79°C

● Green = 200°F/93°C



Lot 3928, Jalan Keretapi Lama
 Off Jalan Kapar 5 1/2 Miles
 42100 Klang
 Selangor Darul Ehsan
 West Malaysia
 Tel: +603-3290 3333
 Fax: +603-3290 2288
 E-mail: sales@demcoalarm.com



Quality without Compromise