


BACKUP BATTERIES

MASTER

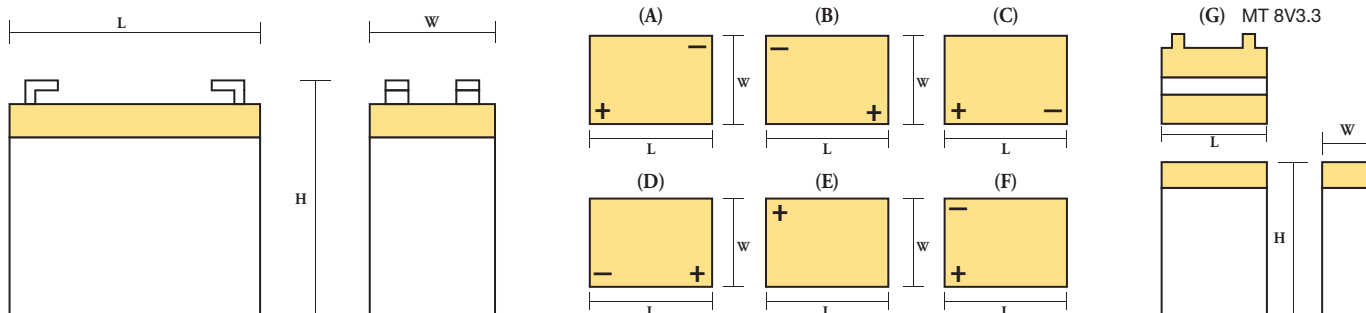

Battery Model	Nominal Voltage (V)	Rated Capacity to Final Voltage (AH)				Dimension (mm)				Approx. Weight (KG)	Unit Per Box (PCS)	Terminal Position
		1.75 Volts/cell				Length (L)	Width (W)	Height (H)	Height (H) Including Terminal			
		20 HR	10 HR	5 HR	1 HR							
MT 6V1.3	6	1.30	1.20	1.10	0.73	97±1	24±1	51±2	56±2	0.30	20	(C)
MT 6V3.2	6	3.20	3.00	2.72	1.67	123±1	32±1	60±2	66±2	0.62	20	(C)
MT 6V3.3	6	3.30	3.10	2.80	1.73	134±1	34±1	60±2	66±2	0.66	20	(C)
MT 6V4	6	4.00	3.80	3.40	2.40	70±1	47±1	101±2	107±2	0.68	20	(A)
MT 6V12	6	12.00	11.10	9.50	6.30	151±1	50±1	94±2	100±2	1.64	10	(C)
MT 8V3.3	8	3.30	3.10	2.80	1.73	67±1	46±1	91±2	91±2	0.76	20	(G)
MT 12V1.3	12	1.30	1.20	1.10	0.73	97±1	43±1	52±2	57±2	0.57	20	(F)
MT 12V2.2	12	2.20	2.10	1.87	1.16	178±1	34±1	60±2	66±2	0.91	20	(C)
MT 12V3.3	12	3.30	3.10	2.80	1.73	134±1	67±1	60±2	66±2	1.23	10	(E)
MT 12V4	12	4.00	3.80	3.40	2.40	90±1	70±1	101±2	106±2	1.34	10	(C)
MT 12V7	12	7.00	6.70	5.95	4.00	151±1	65±1	95±2	101±2	2.05	8	(E)
MT 12V12	12	12.00	11.40	9.50	6.30	151±1	99±1	96±2	100±2	3.51	4	(E)
MT 12V18	12	18.00	17.20	15.20	10.80	181±1	76±1	167±2	167±2	5.37	2	(D)
MT 12V26	12	26.00	23.80	21.60	15.10	166±1	175±1	126±2	126±2	7.75	1	(D)
MT 12V40	12	40.00	38.00	34.00	24.00	197±1	165±1	170±2	170±2	12.40	1	(D)

MASTER ADVANTAGES

- Long service life
- Rugged construction
- Extreme temperature performance
- Fast recharge
- High discharge rates
- Low internal resistance
- UL and CE certified

Battery Model	Nominal Voltage (V)	Rated Capacity to Final Voltage (AH)				Dimension (mm)				Approx. Weight (KG)	Unit Per Box (PCS)	Terminal Position
		If Terminal Voltage s 10.5V				Length (L)	Width (W)	Height (H)	Height (H) Including Terminal			
		20 HR	10 HR	5 HR	1 HR							
MT 12V50	12	57.10	54.30	48.60	33.60	263±3	172±3	221±2	222±2	19.30	1	(C)
MT 12V60	12	68.60	65.10	58.30	40.30	263±3	172±3	221±2	222±2	19.50	1	(C)
MT 12V65	12	69.00	66.20	60.70	42.30	350±3	167±3	178±2	178±2	20.30	1	(C)
MT 12V70	12	80.00	76.00	68.00	47.00	303±3	173±3	224±2	225±2	21.00	1	(C)
MT 12V100	12	95.70	93.80	78.20	52.40	415±3	173±3	224±2	225±2	29.60	1	(C)
MT 12V150	12	143.60	140.70	117.30	78.60	495±3	205±3	209±2	242±2	43.20	1	(F)
MT 12V200	12	191.40	187.60	156.40	104.80	497±3	258±3	209±2	242±2	59.20	1	(F)

DEMCO INDUSTRIES SDN BHD
www.demcoalarm.com

Lot 3928, Jalan Keretapi Lama
Off Jalan Kapar 5 1/2 Miles
42100 Klang
Selangor Darul Ehsan
West Malaysia
Tel: +603-3290 3333
Fax: +603-3290 2288
E-mail: sales@demcoalarm.com



Specifications are subject to change without prior notice.

Quality without Compromise

DEMCO-12-11-V6